DOCUS SUSPENDED

13-Sep.-2018

2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz | COB 3-step | incl. PS | phase-cut dim

CE ⊕ IP20 ◖0,3m ⋏36° ▪

2.0
200mm

	white texture	207564W_
	aluminium brushed	207564L_
	gold	207564G_
	copper	207564P_
	black texture	207564B_

3.0
300mm

	white texture	207664W_
	aluminium brushed	207664L_
	gold	207664G_
	copper	207664P_
	black texture	207664B_

LIGHT COLOUR

2700K	>90CRI	420lm	3
3000K	>90CRI	440lm	5
1800-2850K	>95CRI	360lm	9

2.0 | 3.0 PAR16

max. 35W | GU10 | 100-240VAC | 50-60Hz

CE ⊕ IP20 ◖0,9m ▪

2.0
200mm

	white texture	207520W0
	aluminium brushed	207520L0
	gold	207520G0
	copper	207520P0
	black texture	207520B0

3.0
300mm

| | white texture | 207620W0 |
	aluminium brushed	207620L0
	gold	207620G0
	copper	207620P0
	black texture	207620B0

OPTIONAL
for PAR16 lamps see our catalogue

* For this product, the cable with a plug that comes with the LED module is not needed. Please remove it first and then use the LED module.

not needed *(this notification refers to the part of the cable)*

LED   PAR16

⑤

③ B   B

② A   A

B   B

A   A

mount LED module:

①

⑥

DIMENSIONS

ø84
29
max. 2500
200|300
67   67
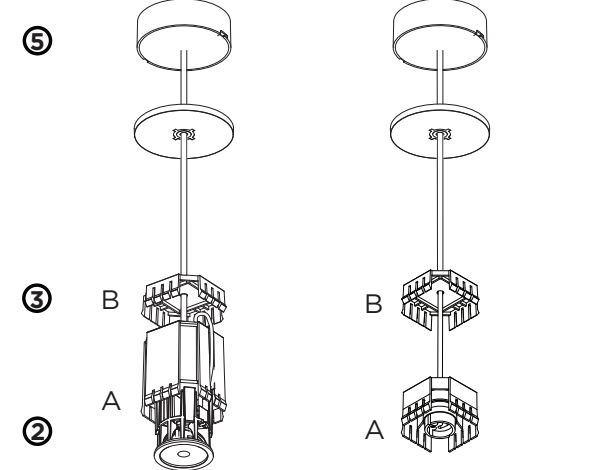
MOUNTING INSTRUCTION

① ONLY FOR LED: mount the LED module into the suspension set.

② Insert part A until it clicks in the lower part of the cover

③ Insert part B until it clicks in the higher part of the cover

④ **POWER CONNECTION**

Connect wiring to the power supply (for LED) or to terminal block (for PAR16)

PARALLEL CONNECTION

220-240V
N ⊕ L   fixture 01   fixture 02   fixture . .
                    L N   L N   L N

⑤ Mount the ceiling base on the celing

(You have to turn the cover counterclockwise a quarter in order to loosen it from the ceiling base and mounting back on is by turning clockwise.)

⑥ ONLY FOR PAR16
Insert the lamp

PB19-010-452-00

INSTALLATION INSTRUCTIONS