

# LIGHT HOUSE 2


## SPECIFICATIONS

<b>MOUNTING</b>		<b>CEILING</b>
POWER	[W]	2x9,3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2x860
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	32
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	92
<b>POWER SUPPLY</b>		<b>220-240V AC 50/60 Hz</b>
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		NO
<b>MATERIAL</b>		<b>ALUMINUM</b>
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,66
GROSS WEIGHT	[kg]	1,70
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



## LIGHT DISTRIBUTION

32°

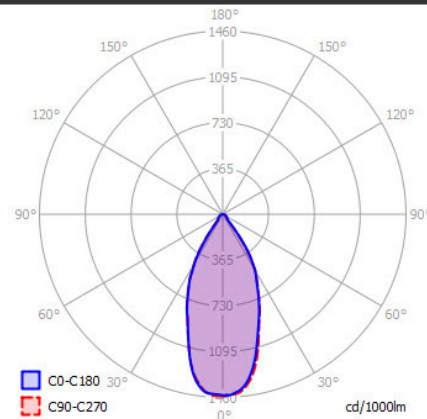


\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES



### Colours



## MOUNTING DIMENSIONS

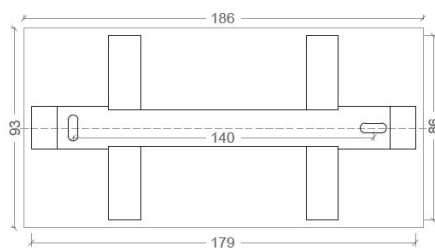

## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING