

LILLI


SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	7
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	730
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	33
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	104
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		ON/OFF or PHASE DIM
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,77
GROSS WEIGHT	[kg]	0,80
COLOUR (HOUSING)		WHITE ~RAL9003



LIGHT DISTRIBUTION

33°

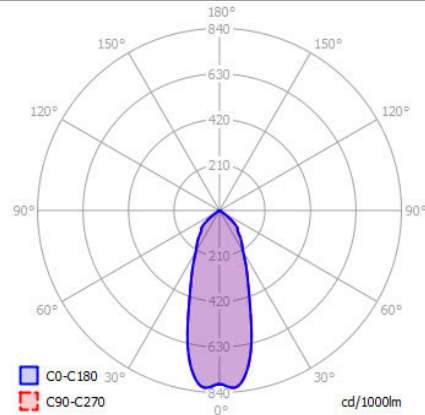


*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES


CEILING HOUSING FOR MULTIPLE PEDANTS LP5/ LP7/ LP8/STAR

Colours





white

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

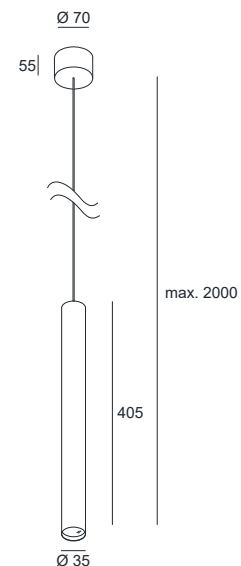

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING