

NEWTON 35

SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	8
LAMP		built-in LED AC LED
LUMINOUS FLUX*	[lm]	560
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	30
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	70
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		PHASE DIM
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP54
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,19
GROSS WEIGHT	[kg]	0,20
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		GREY ANODIZED


Connector external

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

30°

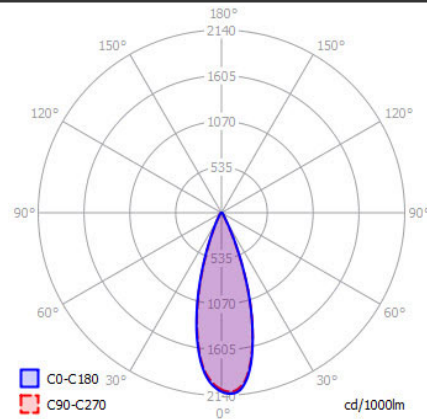

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR 50° ON REQUEST

Colours




white

black

grey

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS



230 V
LED

CRI > 90

DIM



IP54

DLS LIGHTING

www.dslighting.com

*DLS
LIGHTING