


BRICK 30 LED


SPECIFICATIONS

MOUNTING		WALL
POWER	[W]	18
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2160
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	106
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,89
GROSS WEIGHT	[kg]	1,95
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		CHROME

*Luminous flux values are nominal LED data at a operating temperature of 25° C

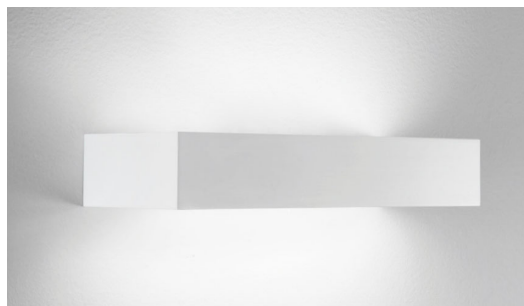

LIGHT DISTRIBUTION

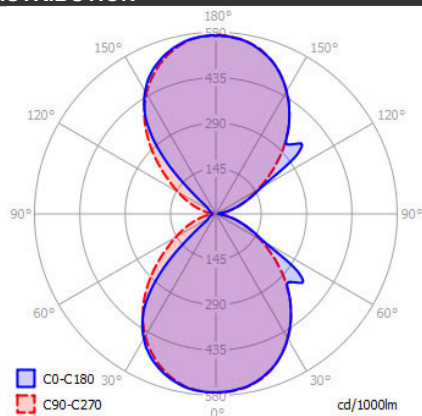


OPTIONS / OPTIONAL ACCESSORIES



Colours



MOUNTING DIMENSIONS (DRILLING TEMPLATE)

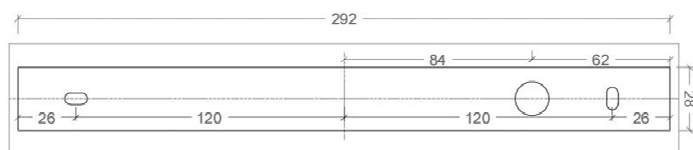

FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

BRICK 30 G9

SPECIFICATIONS

MOUNTING WALL
POWER [W] 3xG9 LED / 3x48W halogen
LAMP NOT INCLUDED


LUMINOUS FLUX* [lm] -
LIGHT COLOUR [K] -
CRI -
BEAM ANGLE [°] -
AVERAGE LIFETIME [h] -
LUMINOUS EFFICACY [lm/W] -

POWER SUPPLY [V] [A] 220-240V AC 50/60 Hz
LED-DRIVER -
DIMMING SEE LAMP
THROUGH-WIRING NO


MATERIAL ALUMINUM
INGRESS PROTECTION IP20
PROTECTION CLASS I
NET WEIGHT [kg] 1,60
GROSS WEIGHT [kg] 1,65

COLOUR (HOUSING) WHITE ~RAL9003
COLOUR (HOUSING) GREY ~RAL9006
COLOUR (HOUSING) CHROME

*Luminous flux values are nominal LED data at a operating temperature of 25° C

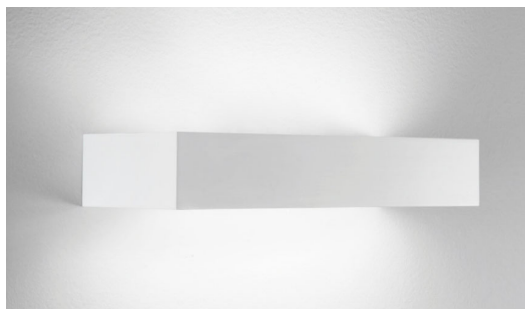

LIGHT DISTRIBUTION

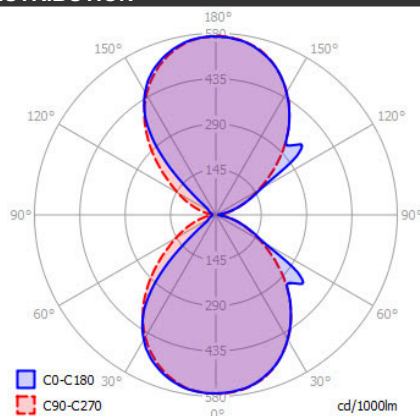


OPTIONS / OPTIONAL ACCESSORIES


Colours



MOUNTING DIMENSIONS

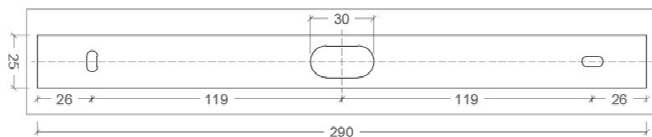

FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING