

# FLOW TQ FLEX

## SPECIFICATIONS

MOUNTING		WALL	
POWER	[W]	2	
LAMP		built-in LED	
LUMINOUS FLUX*	[lm]	190	
LIGHT COLOUR	[K]	3000	
CRI		>90	
BEAM ANGLE	[°]	30	
AVERAGE LIFETIME	[h]	L80/B50.000	
LUMINOUS EFFICACY	[lm/W]	95	
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz	
LED-DRIVER		INCLUDED	
DIMMING		NO	
THROUGH-WIRING		NO	
MATERIAL		BRASS / ALUMINIUM	
INGRESS PROTECTION		IP20	
PROTECTION CLASS		I	
NET WEIGHT	[kg]	0,29	
GROSS WEIGHT	[kg]	0,30	
COLOUR (HOUSING)		BLACK ~RAL9005	n/a
COLOUR (HOUSING)		CHROME	
COLOUR (HOUSING)		PLATINUM	



## LIGHT DISTRIBUTION

n/a

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES

2700K and 4000K LED on request

## Colours




black


chrome

platinum

## MOUNTING DIMENSIONS

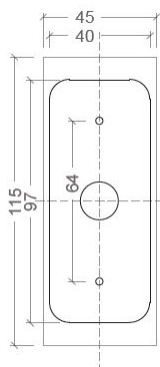

## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING